



Z H O N E

## MXK: Intelligent Terabit Access Concentrator

MXK 319, 819, 823

### Zhone's New MXK Terabit Access Platforms — truly scalable solutions for high-bandwidth applications


- ✓ *Unmatched scalability, with initial 400G backplane and non-blocking 20G to every slot*
- ✓ *Superior intelligence and security with proven SLMS access operating system software*
- ✓ *Intuitive, comprehensive management, with CLI, WebUI, ZMS, and new Smart OMCI*
- ✓ *Flawless delivery of multi-play services over any FTTx or MSAP architecture*



Demands on access networks are increasing at an accelerating rate, requiring a clean-sheet approach to a truly scalable multi-service architecture. Zhone's MXK™ intelligent terabit access concentrator reflects this new approach, featuring an initial 400 Gbps pure packet switching capacity and non-blocking 2x10 Gbps redundant links to every slot. Beyond sheer bandwidth, MXK platforms leverage Zhone's well-proven SLMS access operating system for sophisticated service intelligence, to guarantee high quality of experience for subscribers, along with ease of management to address rising costs of network operation.

The MXK delivers these fundamental advances in access networking while meeting the full spectrum of baseline carrier-class requirements for multi-service hardware and software. For residential triple play and high-bandwidth business services over any FTTx architecture, the MXK solution sets a new performance benchmark for the industry.

The MXK family offers a wide range of options for FTTx solutions. It supports Active Ethernet and GPON line cards, and interoperates with indoor and outdoor ONTs. Supporting Active Ethernet and GPON on the same chassis allows service providers to configure their networks with maximum flexibility and efficiency, using a combination of GPON splitters and dedicated fiber connections.

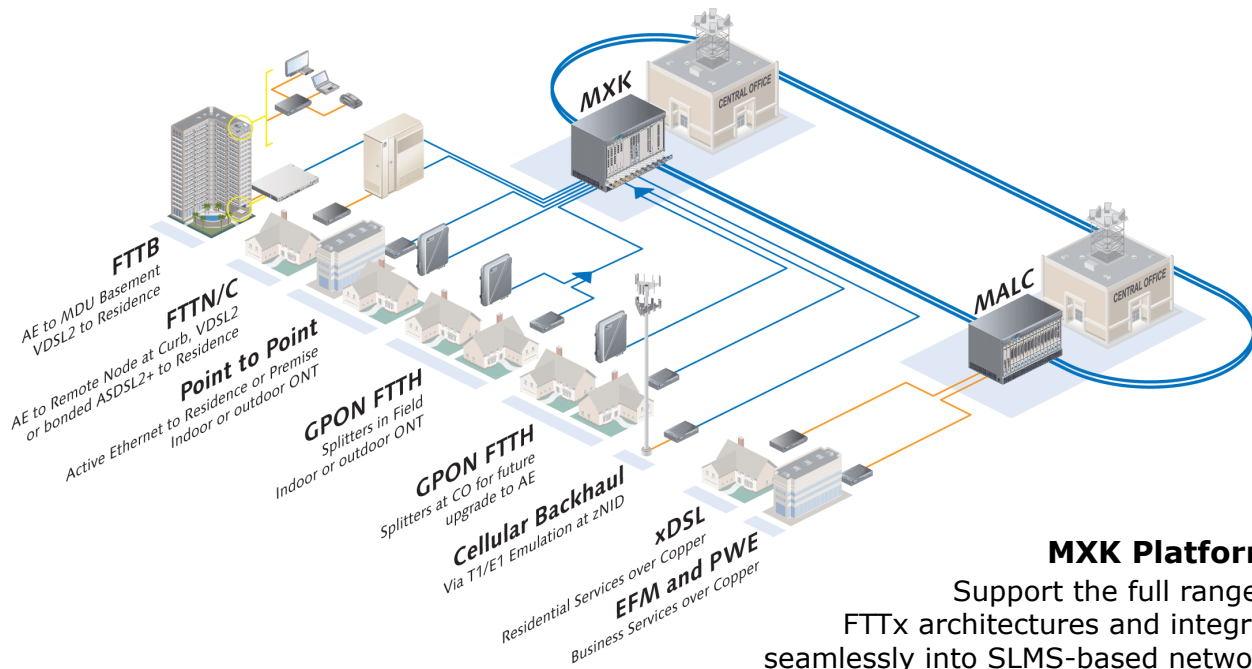

### MXK Chassis

The MXK family includes three fully-integrated form factors: 319 (19" rack x 3RU, with 7 slots for line cards), 819 (19" rack x 8RU, with 14 slots for line cards), and 823 (23" rack x 8RU, with 18 slots for line cards). The chassis support both front and rear power options and are equipped with a cable management tray, easy fan access, and redundant power feeds.

### MXK Uplink Cards

MXK uplink cards offer a mix of multiple 10G and 1G interfaces to suit a variety of network designs. The two configurations currently available are 2x10G + 8x1G and 8x1G. The cards support both copper and fiber SFPs, link aggregation, link redundancy, and the EAPS ring interface.

### MXK Line Cards

The MXK platform supports GPON and Active Ethernet line cards today and is designed for seamless, same-chassis support of ADSL2+, VDSL2, and G.SHDSL EFM as those line cards become available in the coming months.

The 4- and 8-port GPON OLT line cards provide standards-based support of 2.5Gbps downstream and 1.25 Gbps upstream bandwidth. The largest MXK chassis can support up to 9,216 ONTs using Class B+ or C optics.

The Active Ethernet line cards provide up to 360 ports per chassis of 100/1000BT copper or 100/1000Mb fiber-based services. Operators can use a wide variety of SFPs on the same card.

### **SLMS**

Zhone's SLMS (Single Line Multi-Service) access operating system provides intelligent functionality across all the company's hardware products. Driven by 8 years of experience in commercial operation and collaboration with 700+ service providers worldwide, Zhone's SLMS delivers functionality critical to today's access networks in advanced networking, quality of experience, voice, security, and management.

### **Security**

To maintain tight security in the last mile, the MXK platform mounts considerable defenses, powered by all of Zhone's SLMS security features, including multicast control lists, secure bridging, broadcast suppression, dynamic IP filtering, SSH and SFTP, and RADIUS authentication.

### **Management**

The MXK product line integrates fully into the Zhone Management System (ZMS). Using ZMS, thousands of MXK nodes can be managed from remote locations. Customer provisioning, auto discovery, alarm aggregation, and maintenance can easily be performed without any service interruption.

### **Smart OMCI**

Unlike vendors who have dodged the complexity of the ITU's G984.4 standard for GPON ONT management, Zhone provides a simple and clean interface to a fully standards-compliant OMCI implementation. Zhone's Smart OMCI™ approach allows the MXK OLT to interoperate with any vendor's ONT, yielding rapid ONT and service extension without OLT software upgrades. With Smart OMCI you can configure, obtain stats and support alarms on any ONT without hassle.

### **Cabinets**

Zhone offers a full line of outside cabinets engineered specifically to support MXK platforms. Multiple configurations are available for deployments from small to large scales, with a wide range of powering, protection, and line termination options.

## Technical Specifications

### Dimensions

- MXK 319
  - 3U: 5.25 x 17.25 x 11.15 in. / 13.3 x 43.8 x 28.3 cm
  - Line Cards: 7; front card access
- MXK 819
  - 8U: 13.97 x 17.25 x 11.15 in. / 35.5 x 43.8 x 28.3 cm
  - Line Cards: 14; front card access
- MXK 823
  - 8U: 13.97 x 21.18 x 11.15 in. / 35.5 x 53.8 x 28.3 cm
  - Line Cards: 18; front card access

### Power

- DC: -43.75V to -62V
- Dual (A / B redundant) power feeds

### Interfaces

- GPON OLT G.984.1-4 compliant
- Active-Ethernet 802.3ah

### Protocol Support

- Bridging 802.1D
- VLAN 802.1Q with 802.1p
- Multicast IGMP v2 and v3 (Snooping, proxy)
- ITU G.984.1- 984.4 OMCI
- IEEE 802.3ah
- IEEE 802.3ad LACP
- DHCP Relay
- RSTP
- EAPS

### Management

- Unit Level
  - Terminal for Command Line Interface (CLI)
  - Web GUI-based Management
- Network Level
  - ZMS (Zhone Management System) via SNMP v2c for GUI, with CORBA IDL or XML OSS Gateway machine interface for OSS integration
  - Fully ITU standards-compliant Smart OMCI implementation for ONT management

### Regulatory Compliance

- NEBS level 3 compliant\*
- RUS listed\*
- Safety: UL 60950 3rd edition, CSA 950 3rd edition, EN 60950, AS / NZS 3260, TS 001
- Emissions: EN 55022A, CFR47 PART 15A (FCC)
- Immunity: NEBS GR-1089-Core level 3, EN 55024, EN 55082-1, T1.601-1992
- Environmental: NEBS GR-63-Core level 3, GR-487 compliant, ETS 300 019-2-x compliant, ISTA transportation and handling
- Network Certification: FCC Part 68, CTR-12, CTR-13, DOC CS-03, TSO 16, GR-57
- \*In process

### Operating Requirements

- Ambient operating temperature: -40° C to +65° C
- Relative operating humidity: up to 85% (non-condensing)
- GR-487 compliant
- Designed for outside plant deployment

### Uplinks & Line Cards

- Uplinks:
  - 2 x 10G Ethernet + 8 x 1G Ethernet
  - 8 x 1G Ethernet
- Optical Based Line Cards:
  - 4 Port GPON OLT
  - 8 Port GPON OLT
  - 20 Port Active Ethernet (High Performance/ High Density options)

## Ordering Information

## MXK Chassis

MXK-CHASSIS-819	8U, 19" Rack, 14 line-card slots, 2 uplink
MXK-CHASSIS-823	8U, 23" Rack, 18 line-card slots, 2 uplink
MXK-CHASSIS-319	3U, 19" Rack, 7 line-card slots, 2 uplink

## Uplink Controllers

MXK-UPLINK-2x10G-8x1GE	Uplink with 2 x 10G and 8 x 1G Ethernet Ports
MXK-UPLINK-8x1GE	Uplink with 8 x 1G Ethernet Ports

## Line Cards

MXK-GPONX4-IO	GPON Line Card with 4 OLT Ports, SFP based
MXK-GPONX8-IO	GPON Line Card with 8 OLT Ports, SFP based
MXK-AEX20-FE/GE-2S	Active-Ethernet Line Card with 20 SFP based Ports
MXK-AEX20-FE/GE	Single Slot Active-Ethernet Line Card, SFP based, supporting 20 customers

## Software

MXK-SW-DEFAULT	Baseline for operation of residential triple-play or business services OLT
MXK-SW-ADV-QOS	Adds rate-limiting, 802.1P, IPSLA
MXK-SW-SECURITY-SERVICES	Adds secure bridging, MAC swap, SSH, SFTP, ACL, and other controls

## Accessories

MXK-10GE-XFP-LR	XFP, Long Reach Optics 10KM, 10G Ethernet
MXK-GE-SFP-LX	SFP, Long Reach Optics 10KM, 1G Ethernet
MXK-GE-SFP-SX	SFP, Short Reach Optics 500M, 1G Ethernet
MXK-GE-SFP-TP	SFP, Copper 100M, 1G Ethernet
MXK-UPLINK-BLANK	Blank End Panel to cover unused Uplink Slot
MXK-BLANK-ENDPANEL	Blank End Panel to cover unused Line Slot

## ZMS

ZMS-NMS-TR1	ZMS TIER 1 LIC. (1-5K); CLIENT/SERVER SW W/CONFIG, FAULT, REAL-TIME STATS & DIAG FUNCT & ORACLE DB
ZMS-NMS-TR1-STNDBY	ZMS COLD STANDBY TIER 1 LIC. (1-5K); ZMS AND ORACLE DATABASE, REQUIRES PURCHASE OF ZMS-NMS-TR1
ZMS-NMS-TR2	ZMS TIER 2 LIC. (1-50K); CLIENT/SERVER SW W/CONFIG, FAULT, REAL-TIME STATS & DIAG FUNCT & ORACLE DB
ZMS-NMS-TR2-STNDBY	ZMS COLD STANDBY TIER 2 LIC. (1-50K); ZMS AND ORACLE DATABASE, REQUIRES PURCHASE OF ZMS-NMS-TR2
ZMS-NMS-TR3	ZMS TIER 3 LIC. (50K+); CLIENT/SERVER SW W/CONFIG, FAULT, REAL-TIME STATS & DIAG FUNCT & ORACLE DB
ZMS-NMS-TR3-STNDBY	ZMS COLD STANDBY TIER 3 LIC. (50K+); ZMS AND ORACLE DATABASE, REQUIRES PURCHASE OF ZMS-NMS-TR3
ZMS-NMS-OSSGW	ZMS OSS GATEWAY CORBA IDL INTERFACE. REQUIRES CORRESPONDING VERSION OF ZMS NMS.
ZMS-NMS-XML-OSSGW	ZMS OSS GATEWAY XML INTERFACE. REQUIRES CORRESPONDING VERSION OF ZMS NMS.



Zhone Technologies, Inc.  
 @ Zhone Way  
 7001 Oakport Street  
 Oakland, CA 94621  
 510.777.7000 phone  
[www.zhone.com](http://www.zhone.com)

For more information about Zhone and its products, please visit the Zhone Web site at [www.zhone.com](http://www.zhone.com) or e-mail [info@zhone.com](mailto:info@zhone.com)

Zhone, the Zhone logo, and all Zhone product names are trademarks of Zhone Technologies, Inc. Other brand and product names are trademarks of their respective holders. Specifications, products, and/or product names are all subject to change without notice.  
 Copyright 2009 Zhone Technologies, Inc. All rights reserved.