

10/100/1000Base-T to Dual 1000Base-X SFP Media Converter




Enhanced from the current highly-praised version, PLANET GT-1205A Gigabit SFP Media Converter is upgraded by providing 2 Gigabit SFP slots and strengthened redundant function, and featuring:

- DIP Switch for 3-port Operation in Gigabit Switch Mode or Redundant Mode
- Hardware Fiber Port Redundant

Highly Convenient and Distance Extendable

The GT-1205A is equipped with one 10/100/1000Base-T port and dual Gigabit SFP slots to support conversion between 10/100/1000Base-T and 1000Base-X network. The dual SFP slots make the Ethernet signals to connect easily and efficiently by added single-mode or multi-mode media modules or the combination of both types. The GT-1205A provides high reliability and flexibility to extend the media transmission distance up to 550m, 10km or longer, depending on the optional 1000Base-SX / LX SFP transceiver modules.

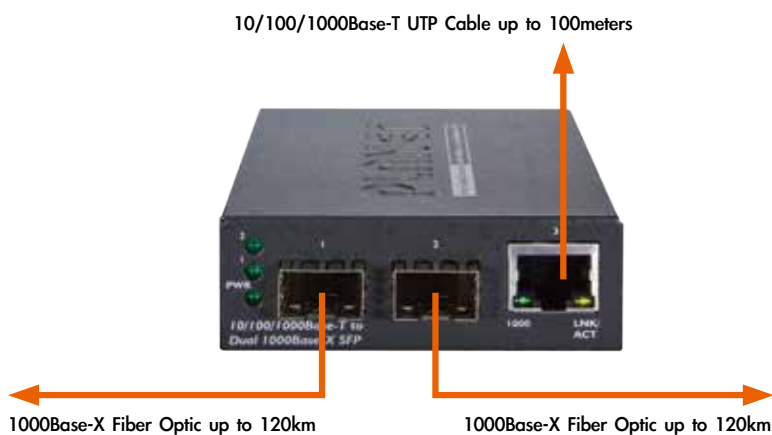

Standard

- Complies with IEEE 802.3 10Base-T
- Complies with IEEE 802.3u 100Base-TX
- Complies with IEEE 802.3ab 1000Base-T
- Complies with IEEE 802.3z 1000Base-SX / LX
- IEEE 802.3x full-duplex flow-control, back-pressure in half-duplex eliminate packets loss

Interface

- Dual 1000Base-SX / LX SFP fiber-optic slots
- One 10/100/1000Base-T Copper, auto MDI/MDIX function
- Auto-negotiation for 10/100/1000Base-T; half-duplex or full-duplex for 10Mbps and 100Mbps, full-duplex for 1000Mbps
- Supports maximum frame size up to 1522 bytes
- IEEE 802.1Q Tag VLAN transparent, multicast passthrough

Redundancy

- Link status auto-detecting and redundant on dual ports with the same connector type
- Allows only the Primary-Port or the Backup-Port to activate at a time
 - When the Primary-Port link fails, the traffic swaps to Backup-Port automatically
 - Once the Primary-Port link regains, the traffic swaps from the Backup-Port to the Primary-Port
- Hardware fiber port redundant

Mechanical

- External 5V / 2A DC power supply
- LED indicators for easy network diagnose
- DIP switch for 3-port operation in Gigabit Switch mode or redundant mode
- Compact in size, easy installation
- Co-work with PLANET 10"/19" Media Converter Chassis (MC-700 / MC-1500 / MC-1500R / MC-1500R48)
- Wall mounting and DIN-Rail installation supported

Adjustable 3-Port Switch Mode or 2 Fiber Port Redundant Mode

Via the built-in DIP switch, the GT-1205A can be configured as 3-port Ethernet switch or 2-port Redundant Media converter. With the 3-port switch mode, the GT-1205A can operate in Store-and-Forward mechanism with high performance; on the other hand, when in the 2-port redundant mode, it provides rapid fiber redundancy of link for highly critical Ethernet applications. The redundant mode also supports auto-recovering function. If the destination port of a packet is link down, it will forward the packet to the other port of the backup pair.



Easy Deployment Standalone or with Chassis

The GT-1205A Gigabit Media Converter can be used as a standalone unit or as a slide-in module to the PLANET Media Converter Chassis, MC-700 and MC-1500 chassis series. These media chassis can assist in providing DC power to the GT-1205A Gigabit Media Converter and the fiber-optic network can be maintained at one central location. With the 3-port switch mode, they work in high performance Store and Forward mechanism, and prevent packet loss with IEEE 802.3x Flow Control (Full-duplex) and Back Pressure (Half-duplex) function.

Plug & Play Installation


As the GT-1205A Gigabit Media Converter fully complies with IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T and IEEE 802.3z 1000Base-LX / SX, the Gigabit media conversion installation is quite quick and easy by simply plug and play.

Applications

Gigabit Ethernet Distance Extension


The GT-1205A directly converts the media from the Gigabit fiber to twisted pair interface. For example, it can be applied between the Gigabit Fiber Switch and the Gigabit Copper Network Card to perform media conversion and transmission.

With the conversion, you can easily have the transmission distance of Gigabit copper cable extended up to 550 meters or longer (depending on SFP module). Built in with two SFP ports, the GT-1205A can integrate with the existed copper switch to provide Gigabit fiber transmission without the need of replacing with the Gigabit Fiber Switch. With the Gigabit fiber transmission, the GT-1205A enables video stream to be delivered from the camera up to 120km away to local Network Video Recorder.

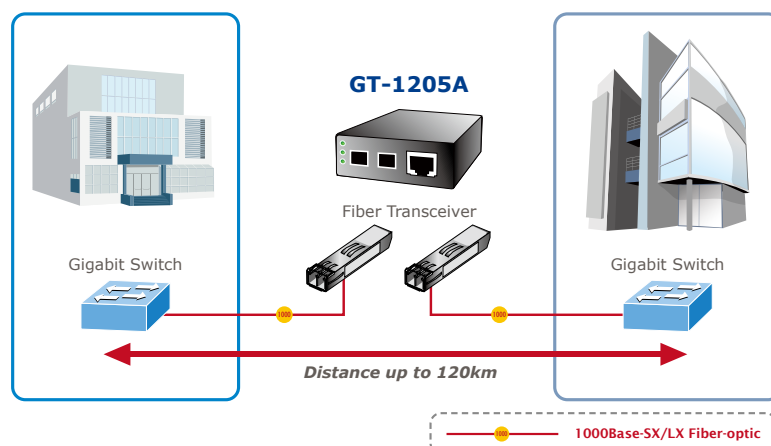



Fiber-Optic Networking for ISP, System Integrator, Enterprise, and Home

With high performance of data transmission and easy installation, the GT-1205A can build the ISP network solution of FTTH (Fiber to the Home), FTTC (Fiber to the Curb) and FTTB (Fiber to the Building). The GT-1205A is also ideal for small office network environment of enterprises.

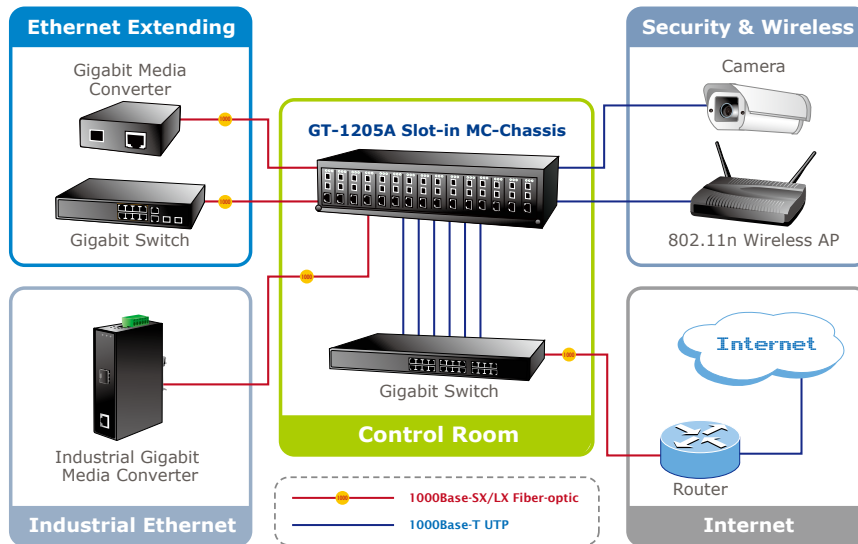

Fault Tolerant Redundant Link for Critical Network Applications

The GT-1205A is designed for optical fiber networks that require rapid link redundancy. With the auto-recovering feature, the redundant media converter responds rapidly for critical applications.

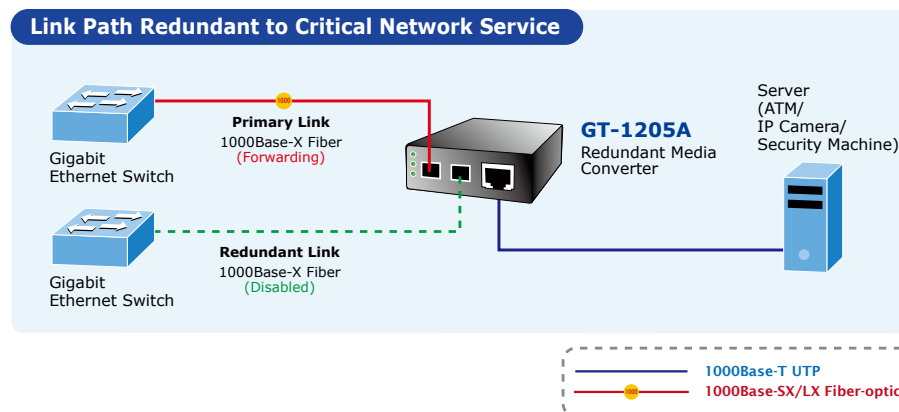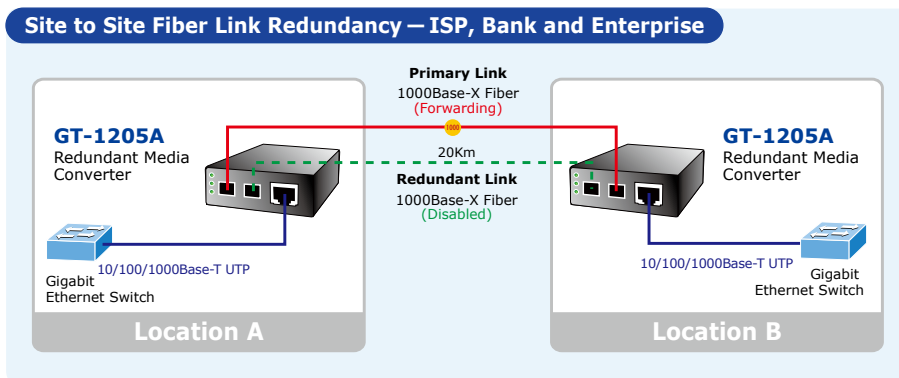

Specifications

Model	GT-1205A	
Hardware Specifications		
Hardware Version	2	
Ports	Copper	1 x 10/100/1000Base-T port
	Fiber	2 x 1000Base-X SFP slots
Cable	Twisted-Pair	10Base-T: 2-Pair UTP CAT. 3, 4, 5, up to 100 meters 100Base-TX: 2-Pair UTP CAT. 5, 5e up to 100 meters 1000Base-T: 4-Pair UTP CAT. 5e, 6 up to 100 meters
	Fiber-Optic Cable	50/125µm or 62.5/125µm multi-mode fiber cable provides up to 220 & 550 meters 9/125µm single-mode cable provides long distance of 10/ 15/ 20/ 30/ 40/ 50/ 60/ 70/ 120km (vary on SFP module)
LED Display	System: One Power LED (Green) Fiber Port: Two LNK/ACT LED (Green) TP Port: One Speed LED (Green) , One LNK/ACT LED (Orange)	
Switch Processing Scheme	Store and Forward	
Fabric	6Gbps	
Throughput (packet per second)	4.4Mpps	
Maximum Packet Size	1522 Bytes	
Flow Control	Back pressure for half-duplex. IEEE 802.3x pause frame for full-duplex	
Power Requirement	5V DC, 2A max.	
Power Consumption	5.4 watts / 18.5 BTU per hour max.	
Dimensions (W x D x H)	94 x 70 x 26 mm	
Weight	191g (device only)	
Standard Conformance		
EMI Safety	FCC Class B, CE	
Operating environment	0 ~ 50 degrees C	
Storage environment	-10 ~ 70 degrees C	
Operating Humidity	5 ~ 95%, Relative Humidity, non-condensing	
Storage Humidity	5 ~ 95%, Relative Humidity, non-condensing	
Standard Compliance	IEEE 802.3	10Base-T
	IEEE 802.3u	100Base-TX
	IEEE 802.3ab	1000Base-T
	IEEE 802.3z	1000Base-SX/LX
	IEEE 802.3x	Flow Control

Ordering Information

GT-1205A	10/100/1000Base-T to Dual 1000Base-X SFP Media Converter
----------	--

Available Modules for GT-1205A

MGB-GT	SFP-Port 1000Base-T Module
MGB-SX	SFP-Port 1000Base-SX mini-GBIC module
MGB-LX	SFP-Port 1000Base-LX mini-GBIC module
MGB-L30	SFP-Port 1000Base-LX mini-GBIC module-30km
MGB-L50	SFP-Port 1000Base-LX mini-GBIC module-50km
MGB-L70	SFP-Port 1000Base-LX mini-GBIC module-70km
MGB-L120	SFP-Port 1000Base-LX mini-GBIC module-120km
MGB-LA10	SFP-Port 1000Base-LX (WDM,TX:1310nm) mini-GBIC module-10km
MGB-LB10	SFP-Port 1000Base-LX (WDM,TX:1550nm) mini-GBIC module-10km
MGB-LA20	SFP-Port 1000Base-LX (WDM,TX:1310nm) mini-GBIC module-20km
MGB-LB20	SFP-Port 1000Base-LX (WDM,TX:1550nm) mini-GBIC module-20km
MGB-LA40	SFP-Port 1000Base-LX (WDM,TX:1310nm) mini-GBIC module-40km
MGB-LB40	SFP-Port 1000Base-LX (WDM,TX:1550nm) mini-GBIC module-40km

PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City
231, Taiwan (R.O.C.)
Tel: 886-2-2219-9518 Fax: 886-2-2219-9528
Email: sales@planet.com.tw www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2013 PLANET Technology Corp. All rights reserved.

GT-1205A